PKT

"TWIN" PA6 INSULATED END SLEEVES

for fine stranded conductors

UL CERTIFIED SAFETY US CA E481745

EN 45545-2

HF HALOGEN FREE

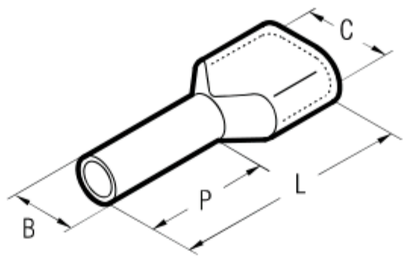

PA6 | Cu | ANNEALED | 3µm TIN PLATED | -20°C +115°C | TRAPEZIUM | SQUARE

Type PKT range of end sleeves is manufactured from Tin plated electrolytic Copper.
The PA6 insulation type PA10080 is certified EN45545-2.
Designed to accomodate two cables terminating in the same sleeve.
The operating temperature range is – 20 to + 115°C (Surge + 130°C).

Recommended crimping tools are shown on pages 170 to 211, 263-265, 296, 298, 300-303.

for International Market (excluding UK)

Conductor Size sqmm		Type	Dimensions mm C	B	P	L	Insulation Colour	ND1,ND2,ND3, ND4 and HNKE 50 Compression Aperture	Price/ Pc.
2 x 0,5	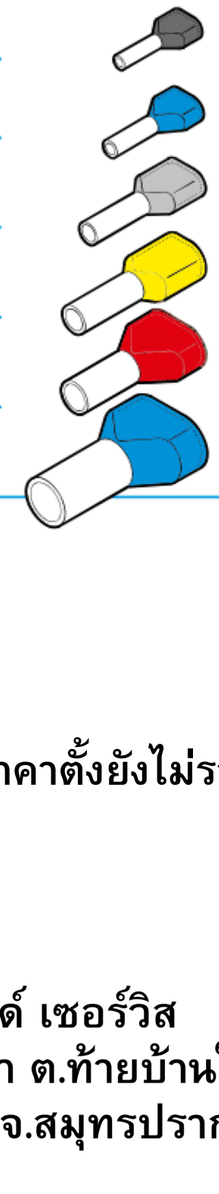	PKT508	4,7x2,6	1,8	8,0	14,0	white	1	2.95
		PKT510♦	4,7x2,6	1,8	10,0	18,0			5.11
2 x 0,75		PKT7508	5,0x2,8	2,1	8,0	15,0	grey	1,5	2.43
		PKT7510	5,0x2,8	2,1	10,0	17,0			3.88
2 x 1		PKT108	5,4x3,4	2,4	8,0	16,0	red	2,5	2.43
		PKT110	5,4x3,4	2,4	10,0	18,0			3.88
2 x 1,5		PKT1508	6,6x3,6	2,6	8,0	16,0	black	2,5	2.59
		PKT1512	6,6x3,6	2,6	12,0	20,0			4.00
2 x 2,5		PKT2510	7,8x4,2	3,2	10,0	20,0	blue	4	2.95
		PKT2512	7,8x4,2	3,2	13,0	22,0			4.22
2 x 4		PKT412	8,8x4,9	4,2	12,0	23,0	grey	6	8.80
2 x 6		PKT614	10,0x6,9	5,3	14,0	26,0	yellow	10	11.67
2 x 10		PKT1014♦	13,3x7,5	6,2	12,0	24,0	red	16	15.98
2 x 16		PKT1614	18,6x9,6	8,9	14,0	30,0	blue	35	19.92

♦Not UL approved

ราคาที่แสดงเป็นราคาตั้งยังไม่รวมส่วนลด ขอส่วนลดโปรดติดต่อตามช่องทางด้านล่าง

ตัวแทนจำหน่าย

PPE
พี.พี.เอ็นจิเนียริ่ง แอนด์ เซอร์วิส
371 หมู่ 8 ถ.แพรกษา ต.ท้ายบ้านใหม่
อ.เมืองสมุทรปราการ จ.สมุทรปราการ
10280

ช่องทางติดต่อ

LINE
โทร: 02-701-5913
มือถือ: 061-230-5655
Id line: @ppeinter
Email: ppe.inter@hotmail.com
Website: www.ppeinter.com