

L-M




L-M range of connectors are designed for jointing low voltage conductors.

Made of electrolytic Copper tube with a purity greater than 99.9%, having the same dimension as A-M series lugs: L-M connectors are annealed and electrolytically Tin plated.

They feature an internal taper at both ends to ease the introduction of the conductor and a central stop to ensure correct positioning. Details of the appropriate crimping tools and dies are shown on pages 348 to 349.

THROUGH CONNECTORS

for Copper conductors

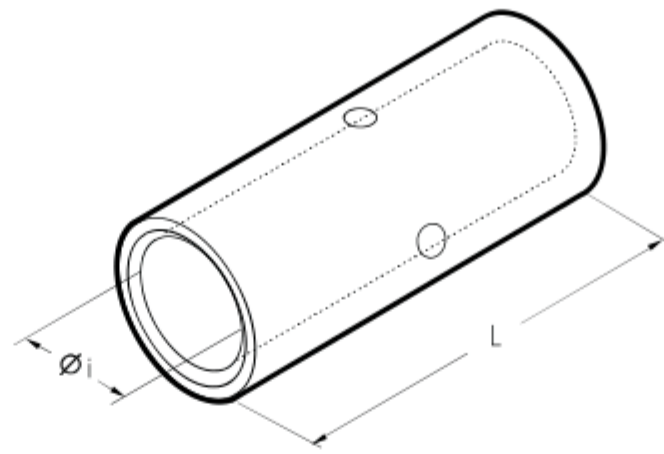

Conductor Size sqmm		Type	Dimensions mm		Price/ Pc.	Mechanical Tools	Hydraulic Tools
Low Stranded	Flexible		Øi	L			
0,25÷1,5	0,25÷1,5	L03-M*	1,8	15	6.98	HN1	B15MD
1,5÷2,5	1,5÷2,5	L06-M*	2,4	15	8.02		
4÷6	4÷6	L1-M	3,6	22	11.51		
10	10	L2-M	4,6	25	22.50	HN5	B15MD
16	16	L3-M	5,8	27	23.65		
25	25	L5-M	7,0	29	32.13		
35	25÷35	L7-M	8,9	33	51.27	HN-A25	B15MD
50	35÷50	L10-M	10,0	37	66.96		
70	50÷70	L14-M	11,3	39	83.76		
95	70÷95	L19-M	13,5	43	131.05	TN70SE	B15MD
120	95÷120	L24-M	15,2	47	195.80		
150	120÷150	L30-M	16,7	58	268.72		
185	150÷185	L37-M	19,2	64	367.73	TN120 SE*	B15MD
240	185÷240	L48-M	21,1	75	539.22		
300	240÷300	L60-M	23,7	90	808.82		
400	300÷400	L80-M	27,0	94	1,151.36	TN120 SE*	B15MD
500	400÷500	L100-M	30,3	98	1,518.20		
630	500÷630	L120-M*	33,4	105	2,822.04		
800	600	L160-M*	38,0	112	3,325.90	TN120 SE*	B15MD
1000	800	L200-M*	44,0	120	4,262.90		

*See page 187

L-P




Made of electrolytic Copper tube with a purity greater than 99.9%, having the same dimensions as A-M series lugs, L-P connectors are annealed and electrolytically Tin plated.

They feature an internal taper to ease the introduction of the conductor.

Details of the appropriate crimping tools and dies are shown on pages 348 to 349.

PARALLEL CONNECTORS

for Copper conductors

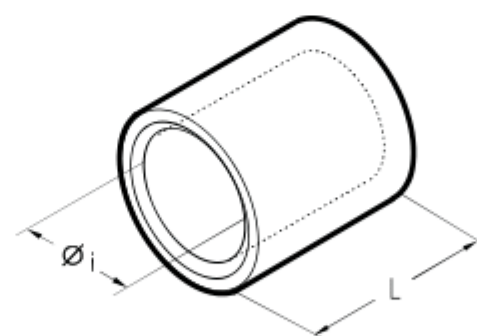

Total Conductor Size sqmm		Type	Dimensions mm		Price/ Pc.	Mechanical Tools	Hydraulic Tools
Low Stranded	Flexible		Øi	L			
0,25÷1,5	0,25÷1,5	L03-P	1,8	6,0	5.55	HN1	B15MD
1,5÷2,5	1,5÷2,5	L06-P	2,4	6,0	5.59		
4÷6	4÷6	L1-P	3,6	9,0	7.34		
10	10	L2-P	4,6	10,5	12.29	HN5	B15MD
16	16	L3-P	5,8	11,5	14.61		
25	25	L5-P	7,0	13,0	20.75		
35	25÷35	L7-P	8,9	14,0	26.87	HN-A25	B15MD
50	35÷50	L10-P	10,0	16,0	34.47		
70	50÷70	L14-P	11,3	18,0	45.52		
95	70÷95	L19-P	13,5	19,0	68.73	TN70SE	B15MD
120	95÷120	L24-P	15,2	22,0	96.13		
150	120÷150	L30-P	16,7	26,5	151.82		
185	150÷185	L37-P	19,2	26,5	188.50	TN120 SE*	B15MD
240	185÷240	L48-P	21,1	34,0	291.26		
300	240÷300	L60-P	23,7	43,0	-		

★ ราคาที่แสดงเป็นราคาตั้งยังไม่รวมส่วนลด ขอส่วนลดโปรดติดต่อตามช่องทางด้านล่าง

PPE ฟิ.พี.เอ็นจิเนียริ่ง แอนด์ เซอร์วิส
371 หมู่ 8 ถ.แพรงษา ต.ท้ายบ้านใหม่
อ.เมืองสมุทรปราการ จ.สมุทรปราการ
10280



โทร: 02-701-5913
มือถือ: 061-230-5655
Id line: @ppeinter
Email: ppe.inter@hotmail.com
Website: www.ppeinter.com

*Not UL approved