


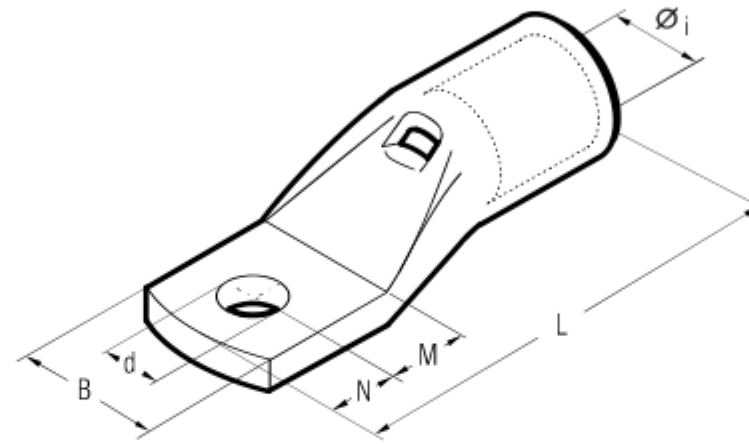

NEW

Cond. Size Flexible sqmm	Ø Stud mm	Type	Dimensions mm						Price/ Pc.	Mechanical Tools		Hydraulic Tools				
			Øi	B	M	N	L	d								
10	5	A2-M5/9	4,6	9,0	6,5	6,0	26,0	5,3	27.49	HN5	HN-A25	TN70SE	B15MD	HT45-E	B450ND-BV	RH50
16	5	A3-M5/9	5,8	9,0	6,5	6,0	30,5	5,3	27.49							
25	5	A5-M5/9	7,0	9,0	6,5	6,0	31,5	5,3	154.25	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
35	6	A7B-M6/11.5*	8,9	11,5	8,0	7,0	36,5	6,4	69.17							
50	6	A10B-M6/11.5*	10,0	11,5	8,0	7,0	40,5	6,4	86.85	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
70	6	A14B-M6/11.5*	11,3	11,5	8,0	7,0	44,5	6,4	118.67							
95	8	A19B-M8/15.5*	13,5	15,5	9,0	8,0	52,5	8,4	184.75	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
	8	A19-M8/19	13,5	19,0	9,0	8,0	52,5	8,4	169.72							
120	8	A24B-M8/19*	15,2	19,0	14,0	9,0	60,0	8,4	373.47	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
	10	A24B-M10/19*	15,2	19,0	14,0	9,0	60,0	10,5	344.74							
150	8	A30B-M8/19*	16,7	19,0	18,0	9,0	70,0	8,4	461.87	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
	10	A30B-M10/19*	16,7	19,0	18,0	9,0	70,0	10,5	426.07							
185	10	A37B-M10/24.5*	19,2	24,5	18,0	9,0	77,0	10,5	512.70	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
	10	A48-M10/31	21,1	31,0	13,0	9,0	80,0	10,5	669.60							
240	12	A48-M12/31	21,1	31,0	16,0	12,0	86,0	13,2	662.97	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
	16	A48-M16/31	21,1	31,0	19,0	17,0	94,0	17,0	727.06							
300	10	A60B-M10/31*	23,7	31,0	16,0	12,0	95,0	10,5	1,018.76	TN70SE	TN120SE	B15MD	HT45-E	B450ND-BV	RH50	B500ND
	12	A60B-M12/31*	23,7	31,0	16,0	12,0	95,0	13,2	1,001.08							

*Without inspection hole

This range of terminals features contained palm width and has been specifically developed for application on L.V. circuit breakers with reduced space terminal blocks.

The contained palm width allows an immediate and easier installation.

CEMBRE terminals are manufactured from electrolytic Copper tube with a purity greater than 99.9%.

The specifically designed section of the barrel and the choice of principal dimensions are optimising the best combination of mechanical strength and electrical conductivity.

These terminals are annealed to guarantee optimum ductility and are electrolytically Tin plated to avoid oxidation.

The barrel is provided with an internal taper to ease the introduction of the conductor; furthermore, its length grants a comfortable and correct positioning between dies, during crimping operations. Each palm is marked with the CEMBRE logo and part number.

Easy to install via cable gland, allows for pre-installation.

Details of the appropriate crimping tools and dies are shown on pages 348 to 349.


★ ราคาที่แสดงเป็นราคาตั้งยังไม่รวมส่วนลด ขอส่วนลดโปรดติดต่อตามช่องทางด้านล่าง

ตัวแทนจำหน่าย



พี.พี.เอ็นจิเนียริ่ง แอนด์ เซอร์วิส
371 หมู่ 8 ถ.แพรक्षा ต.ท้ายบ้านใหม่
อ.เมืองสมุทรปราการ จ.สมุทรปราการ
10280

ช่องทางติดต่อ

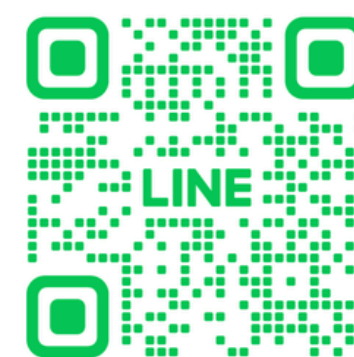

โทร: 02-701-5913
มือถือ: 061-230-5655
Id line: @ppeinter
Email: ppe.inter@hotmail.com
Website: www.ppeinter.com