


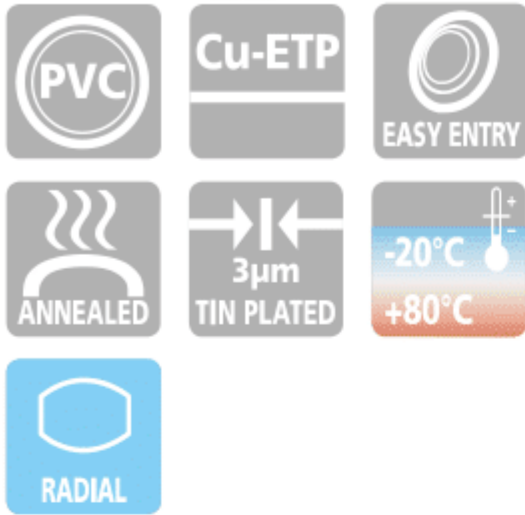

The unique funnel shaped PVC sleeve guarantees total insertion of the conductor strands into the terminal barrel, creating a secure and reliable, electrical and mechanical connection.

The internal surface of the barrel is rifled to improve contact with conductor strands when crimped and to increase tensile strength.

The "F" range of terminals offers a wide selection of pins and blades, design to meet the ever changing end user requirements.


The PVC insulation, is a self extinguishing thermoplastic material class V0 (UL 94).

The operating temperature range is -20 to +80°C (Surge +90°C).

Recommended crimping tools are shown on pages 170 to 209, 296.




pin terminals

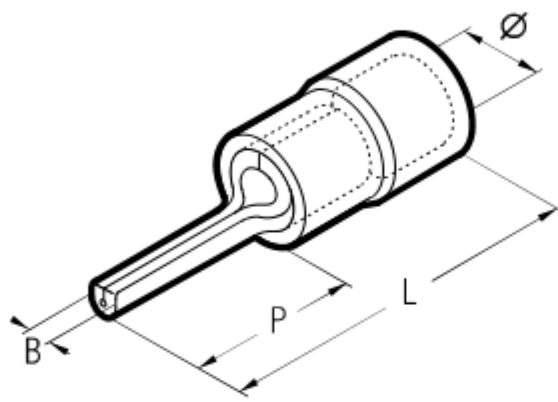


Conductor Size sqmm (AWG)	Type	Dimensions mm				Price/ Pc.
		Ø	B	P	L	
 0,25÷1,5 (22÷16)	RF-P8	4,0	1,6	8,0	17,8	3.41
	RF-P10	4,0	1,6	10,0	19,8	3.33
	RF-P12	4,0	1,6	12,0	22,0	3.54
 1,5÷2,5 (16÷14)	BF-P8	4,9	1,6	8,0	17,8	3.67
	BF-P10	4,9	1,6	10,0	19,8	3.54
	BF-P12	4,9	1,6	12,0	21,8	3.79
 4÷6 (12÷10)	GF-P10	6,6	2,2	10,0	24,5	6.44
	GF-P12	6,6	2,2	12,0	26,7	6.10
	GF-P14	6,6	2,2	14,0	28,7	6.50

blade terminals

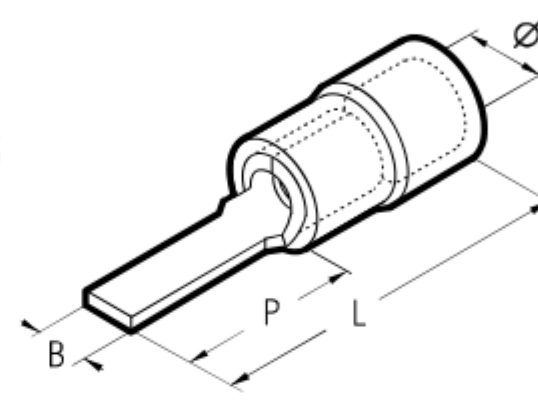


Conductor Size sqmm (AWG)	Type	Dimensions mm				Price/ Pc.
		Ø	B	P	L	
 0,25÷1,5 (22÷16)	RF-PP12	4,0	3,0	12,8	22,8	4.24
	RF-PP12/1	4,0	3,0	11,3	21,3	3.86
	RF-PP12/19	4,0	1,9	13,2	23,2	3.86
	RF-PP12/23	4,0	2,3	13,2	23,2	4.32
	RF-PP14	4,0	3,0	14,8	24,8	5.28
	RF-PP16/23	4,0	2,3	17,2	27,2	5.17
 1,5÷2,5 (16÷14)	BF-PP10	4,9	3,5	10,0	20,0	8.75
	BF-PP12	4,9	3,5	12,8	22,8	4.62
	BF-PP12/25	4,9	2,5	13,3	23,3	4.28
	BF-PP12/29*	4,9	2,9	13,3	23,3	4.79
	BF-PP16/25	4,9	2,5	17,2	27,2	5.53
 4÷6 (12÷10)	GF-PP12	6,6	4,0	13,3	27,4	8.09
	GF-PP17	6,6	2,9	19,2	33,3	9.91

hooked blade terminals

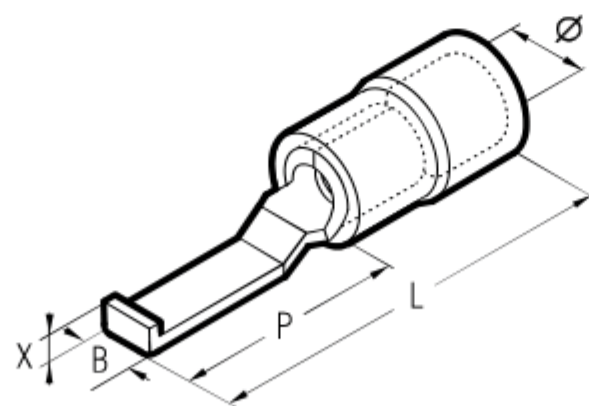

Conductor Size sqmm (AWG)	Type	Dimensions mm					Price/ Pc.
		Ø	B	P	L	X	
 0,25÷1,5 (22÷16)	RF-PPL30*	4,0	3,0	17,5	28,3	1,7	5.78
	RF-PPL46*	4,0	4,6	17,5	28,3	1,7	6.50
 1,5÷2,5 (16÷14)	BF-PPL30*	4,9	3,0	17,5	28,3	1,7	6.38
	BF-PPL46*	4,9	4,6	17,5	28,3	1,7	6.67
 4÷6 (12÷10)	GF-PPL46*	6,6	4,6	17,5	32,6	1,9	8.62

★ ราคาที่แสดงเป็นราคาตั้งยังไม่รวมส่วนลด ขอส่วนลดโปรดติดต่อตามช่องทางด้านล่าง
ตัวแทนจำหน่าย

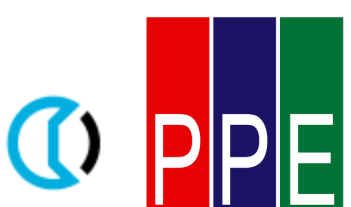

พี.พี.เอ็นจิเนียริ่ง แอนด์ เซอร์วิส
371 หมู่ 8 ถ.แพรรษา ต.ท้ายบ้านใหม่
อ.เมืองสมุทรปราการ จ.สมุทรปราการ
10280



โทร: 02-701-5913
มือถือ: 061-230-5655
Id line: @ppeinter
Email: ppe.inter@hotmail.com
Website: www.ppeinter.com

*Not UL approved